


1. MIRO INDUSTRIES INC IS NOT RESPONSIBLE FOR THE INSTALLATION OR LOCATION OF UNITS.
2. GENERAL CONTRACTOR/ARCHITECT/CLIENT IS TO VERIFY THAT THE LOCATION OF THE EQUIPMENT SUPPLIED BY MIRO INDUSTRIES DOES NOT CONFLICT WITH DOORWAYS, ROOF DRAINS, MECHANICAL UNITS, ETC.
3. USING SUPPORTS ON ROOF SLOPES GREATER THAN  $\frac{1}{4}$ :12 WILL REQUIRE THE USE OF SLOTTED BASES.
4. INSTALLATION PROCEDURES SHALL CONFORM TO SECTION 07 70 00 OF MIRO SPECIFICATIONS.
5. CUSTOM ASSEMBLIES ARE NON CANCELABLE AND NON RETURNABLE.
6. MIRO RESERVES THE RIGHT TO MODIFY PRODUCT DESIGN, SPECIFICATION AND INFORMATION ON THIS SHEET AND OTHER DRAWINGS WITHOUT NOTICE AND WITHOUT INCURRING ANY OBLIGATIONS.
7. THE MAXIMUM WORKING LOAD OF EACH SUPPORT SHALL NOT INDUCE MORE THAN 2 PSI TO ANY PART OF THE ROOFING MATERIAL.
8. USE OF SUPPORT PAD OR ANTI-SLIP PAD RECOMMENDED UNDER EACH BASE (NOT INCLUDED UNLESS NOTED OTHERWISE).
9. 20 YEAR WARRANTY PROVIDED UPON COMPLETION OF WARRANTY CARD.
10. ALL METAL STRUT, PIPE SUPPORTS, HANGERS, ECT., SHALL BE HOT DIP GALVANIZED AFTER FABRICATION PER ASTM A123. ALL THREADED PRODUCTS, THREADED ROD, NUTS, BOLTS, ECT., SHALL BE HOT DIPPED GALVANIZED IN CONFORMANCE WITH ASTM A153. GALVANIZED COATINGS DAMAGED BY TRANSPORTING, HANDLING, CUTTING, BOLTING OR WELDING SHALL BE REPAIRED USING ASTM A780 ZINC-RICH PAINT FOR GALVANIZING.

1. WORK SHALL INCLUDE DESIGN, MATERIAL AND ASSEMBLY OF QUOTED MATERIAL UNLESS OTHERWISE SPECIFIED.
2. PRODUCTS ARE DESIGNED TO ACCOMMODATE SPECIAL CONDITIONS BASED ON INFORMATION PROVIDED TO MIRO INDUSTRIES. MIRO INDUSTRIES IS NOT RESPONSIBLE FOR PRICE CHANGES OR INCORRECT PRODUCT DESIGN DUE TO A LACK OF INFORMATION PROVIDED DURING THE QUOTING PHASE, OR ANY CHANGES THAT MAY OCCUR ON THE PROJECT AFTER THE BIDDING PROCESS HAS BEEN COMPLETED.

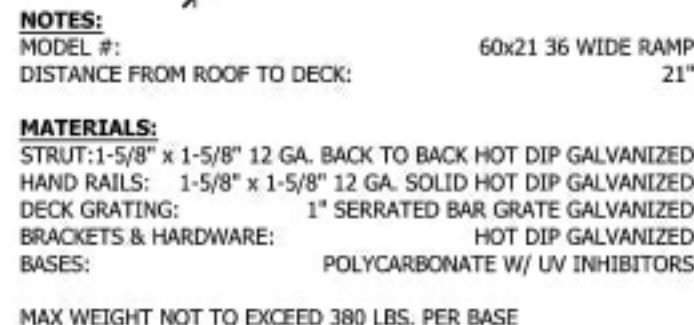

MIRO INDUSTRIES, INC.  ROOFTOP SUPPORT PRODUCTS

M1.1