




# Technical Data

**Stainless Steel Collated  
Roofing Nails**  
Smooth or Ring Shank



Shank Type	Length	Head Diameter	Shank Diameter	Box Count	Box Weight
Ring	1"	3/8"	0.12"	7200	32 lbs.
Ring	1"	3/8"	0.12"	2400	11 lbs.
Ring	1 1/4"	3/8"	0.12"	7200	36 lbs.
Ring	1 1/4"	3/8"	0.12"	2400	12 lbs.
Ring	1 1/2"	3/8"	0.12"	7200	42 lbs.
Ring	1 1/2"	3/8"	0.12"	2400	14 lbs.
Ring	1 3/4"	3/8"	0.12"	7200	48 lbs.
Ring	1 3/4"	3/8"	0.12"	2400	16 lbs.




Shank Type	Length	Head Diameter	Shank Diameter	Box Count	Box Weight
Smooth	1"	3/8"	0.12"	n/a	n/a
Smooth	1 1/4"	3/8"	0.12"	7,200	36 lbs.
Smooth	1 1/4"	3/8"	0.12"	2,400	12 lbs.
Smooth	1 1/2"	3/8"	0.12"	7,200	42 lbs.
Smooth	1 1/2"	3/8"	0.12"	2,400	14 lbs.
Smooth	1 3/4"	3/8"	0.12"	7,200	48 lbs.
Smooth	1 3/4"	3/8"	0.12"	2,400	16 lbs.

Compatible with:

- Bostitch N12-1 (1 1/4" to 1 3/4"), N12B & RN45B;
- Hitachi NV45AB;
- MAX CN450R;
- Porter Cable 134R & RN175;
- Senco SCN200R & SCN40R (3/4" to 1 1/2");
- Stan-Tech SDCN10-1;
- Makita AN451

Features:

- Lasting corrosion protection for all roofing materials•
- Smooth shank or annular styles in stock•
- Recommended first choice for fiber cement roofing & siding products•
- 304 & 316 Stainless Steel Available•

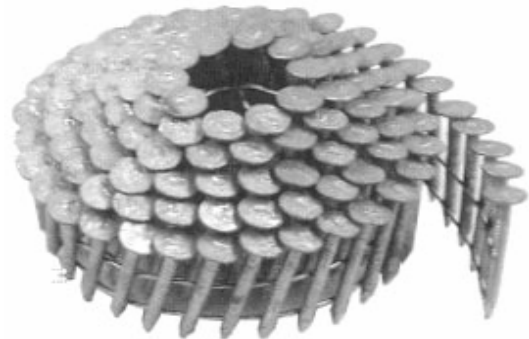

511 Central Park Drive, Sanford, Florida 32771-6653  
407.328.5300 800.334.9815 407.328.5250 (fax)